


SERIE ETERNITY

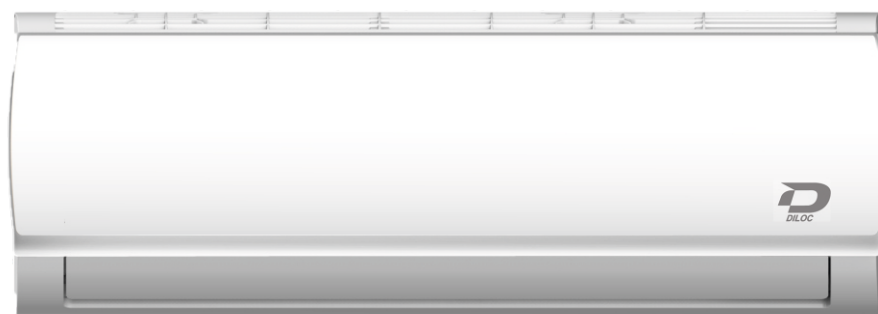

		D.ETERNITY109+ D.ETERNITY9	D.ETERNITY112+ D.ETERNITY12	D.ETERNITY118+ D.ETERNITY18	D.ETERNITY124+ D.ETERNITY24
Alimentazione					
Capacità nominale	Btu/kW	9000(3100~11600)/2638 /2,6	12000(3800~14200) /3,5	18000(1157~19900) /5,3	24000(7100~27000) /7,0
Potenza assorbita	W	732(100~1240)	1213(130~1580)	1550(560~2050)	2600(420~3150)
Corrente assorbita	A	3,18(0.4~5.4)	5,27(0.5~6.9)	6,7(2.4~8.9)	11,5(1.8~13.8)
EER		3,6	3,28	3,43	3,28
Unità esterna					
Capacità nominale	Btu/kW	10000(2800~11500)/2,9	13000(3700~14400)/3,8	19000(10580~19960)/5,6	25000(5500~27000)/7,3
Potenza assorbita	W	733(120~1200)	1088(100~1680)	1570(780~2000)	2400(300~2750)
Corrente assorbita	A	3,18(0.5~5.2)	4,73(0.4~6.9)	6,8(3.4~8.7)	11(1.3~12.2)
COP		3,92	3,71	3,76	3,73
Raffr. stagionale Capacità (pdesignc)	kW	2,8	3,6	5,2	7,0
SEER/Classe Efficienza Energetica		6,3/A+++	6,1/A+++	7,4/A+++	6,1/A+++
Risc. (clima caldo) Capacità (pdesignh)	kW	2,6	2,7	4,5	6,4
SCOP/Classe Efficienza Energetica		5,1/A+++	5,1/A+++	5,1/A+++	5/A+++
Unità interna					
Portata d'aria max. Raffr./Risc.	m3/h	466/360/325	540/430/314	840/680/540	980/817/662
Liv. Press.Sonora (Turbo/Alta/Med/Bassa/Mute)	dB(A)	38,5/32/25/21	40,5/34,5/25/21	42,5/36/26/22	45/40,5/36/24
Dimensioni (LxAxP)	mm	805x194x285	805x194x285	957x213x302	1040x220x327
Peso netto/lordo	Kg	7.6/9.7	7.6/9.8	10/13	12.3/15.8
Unità Esterna					
Liv. Press.Sonora/Potenza Sonora	dB(A)	55,5/62	56/63	56/63	59/67
Dimensioni (LxAxP)		720x270x495	720x270x495	805x330x554	890x342x673
Peso netto/lordo	Kg	23.2/25	23.2/25	32.7/35.4	42.9/45.9
Refrigerante					
Tipo/GWP/Quantità precaricata		R32/675/0,55	R32/675/0,55	R32/675/1,08	R32/675/1,42
Tubazione gas					
Lato liquido/Lato gas	Pollici	1/4"-3/8"	1/4"-3/8"	1/4"-1/2"	1/4"-5/8"
Max lungh. Tubazioni/dislivello	m	25/10	25/10	30/20	50/25